


NOTE:

Vertical axle stands for load capacity while horizontal axle stands for load center. Load center is the distance counted from the front of the fork. The base point of the standard load is the center point of the cubic with the same 1200mm dimension in length, width and height. The load capacity should be down, if mask tilts forward, using non-standard forks or loading goods with extra width. Please notice the different load capacity between different load centers according to load chart.

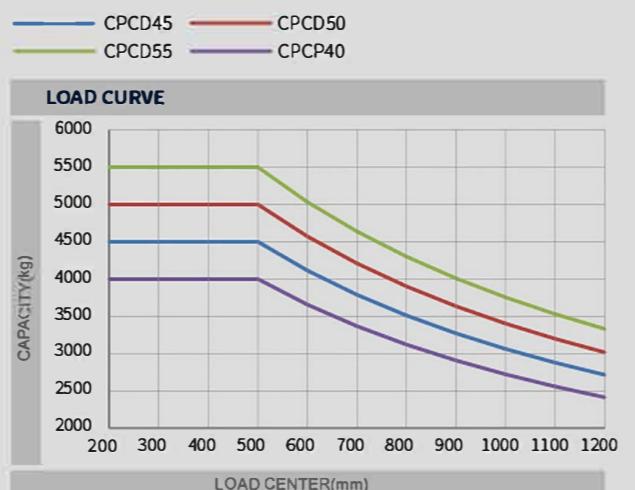

Standard configuration	Optional configuration
Reversing handle (with horn)	Warming light
Protection sleeve for steering cylinder	Cab
LED lights	Two stage free lift mast and three stage free lift mast
File folder	Dual tyre of front wheel and solid tyre
HEAN semi enclosed seat	Thread
Middle wide angle rear view mirror	Synchronized steering system
Median exhaust	Rear view mirrors on both sides
Steering wheel with handle ball	Dual hose pulley block
Counter weight protection net	High exhaust
Adjustable steering wheel	Double air filter
Ratchet parking brake	Rear lamp
Flexible connection casting steering axle	Protection sleeve for tilt cylinder
Stamping overhead guard	GRAMMER'S full suspension seat
Electric-hydraulic reversing control	Air conditioner
Air filter with safety filter element	Heater
LCD instrument	OPS control system

CPCD 40/45/50/55

QC7G3/M4G3



4-5.5 t

G3 series Internal Combustion Counterbalanced Forklift Truck

AESTHETICS / FUNCTIONAL

A Design Of Perfect Combination



A NEW GENERATION OF PRODUCTS

Intelligent / Safe / Efficient / Saving and Environment Friendly

COMFORTABLE OPERATION

New family PI image design, appearance upgrade, optimized structure design and high-end configuration ensure comfortable operation from every detail.



Flexible connected intelligent shift hydraulic transmission has been verified by market for 30 years and has the features of mature and reliable, small vibration, convenient and comfortable operation;



The standard configuration of electro-hydraulic reversing and steering handle and lamp combination handle improves the operation convenience;

- High quality damping system matched with professional calculation make the idle vibration isolation rate up to 68%; high quality Hutchinson damping pad is adopted and has the features of more stable damping effect and longer service life;



The tilt cylinder sinks to improve the leg space;



Full LCD color display CAN bus instrument fully monitors truck status; displays real-time engine and truck fault information and gives humanized reminder;



Wide view mast optimizes the blind area of operation vision and ensures comfortable and safe operation;



Standard configuration of mast lowering buffer makes it more comfortable to handle goods;




- The ratchet type parking brake handle is more labor-saving.
- Increased handle with leather anti-skid makes getting on and off more convenient; Reversing handle with horn makes truck reversing safer.

ENERGY SAVING AND ENVIRONMENT FRIENDLY

- Standard configuration of load sensing gives priority to steering and saves energy by 5%.
- The dual pump combined hydraulic system can supply flow on demand and reduce truck fuel consumption;
- Standard configuration of LED lights make truck more energy saving ,environment friendly,long life using and reliable.

HIGHER EFFICIENCY

- Enlarged high air intaking gridmakes air intake smoother and engine power utilization more sufficient.
- Tail-free frame reduces truck center of gravity and improves truck lateral stability and bearing capacity at high.

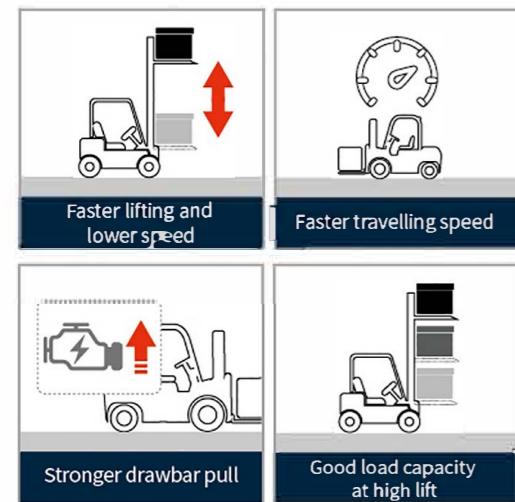

HELI smart fleet management system (optional)

Vehicle positioning	Vehicle management
Remote diagnosis	Identification recognition (optional)
Remote monitoring	Weight management (optional)
Maintenance reminder	Collision management (optional)
Statistical form	



EASY MAINTENANCE

- 80° opening angle, easy opening mechanism and optional key lock make repair and maintenance easy.
- Module design of electric system reduces maintenance cost.



High strength integral welded overhead guard improves driving safety factor;

SAFE AND RELIABLE

- The standard hydraulic power assisted braking system has stronger tolerance to working environment (such as dust) and stable and reliable braking performance;
- The electro-hydralic reversing box and control box are mature and reliable, and the pipeline layout is optimized to effectively reduce the failure rate of electrical components;
- The waterproof connector is safe and reliable;
- Increased pipe diameter of hydraulic system reduces the pressure loss and extends the service life of hydraulic components;
- Increase the aluminum plate fin radiator controls temperature in a good range and effectively improves the reliability of each system;
- The standard 8-inch air filter with safety filter element is equipped with air filter blockage alarm device to remind the maintenance of the air filter in time, protect the engine and improve the reliability of the engine;

- Equipped with cast steering axle, the strength of the axle body is increased by 30%, and the standard protective sleeve is provided;
- High strength integral welded overhead guard improves driving safety factor;
- The balance weight is optimized to improve the rear field of view and ensure the safety of operation;
- The rear wheels are equipped with Zhengxin 14-layer tires as standard to improve the service life of tires;
- The metal step is anti-skid, reliable and durable;
- The optimized brake can effectively prevent locking after rain, reduce braking impact, extend the service life of the brake, prevent excessive braking, and significantly improve the reliability and service life.



Manufacturer and Technical Data									
Characteristics									
1.01	Manufacturer								
1.02	Model								
1.03	Configuration number				QC7G3/M4G3				
1.04	Rated capacity	Q	kg	4000	4500 (4000)	5000 (4500)	5500 (5000)		
1.05	Load center distance	c	mm		500 (600)				
1.06	Power mode				Diesel/LPG/Dual fuel				
1.07	Driving mode				Sit-on type				
1.08	Front overhang	x	mm			560			
1.09	Wheelbase	y	mm			2100			
	Weight								
2.01	Total weight		kg	6250	6510	6920	7280		
2.02	Axle load (laden,front/rear)		kg	9110/1140	9840/1170(9280/1230)	10540/1370(10000/1420)	11270/1510(10760/1520)		
2.03	Axle load (unladen,front/rear)		kg	3100/3150	3080/3430	3030/3890	3010/4270		
	Tyres								
3.01	Tyre type				Pneumatic type				
3.02	Tyre size,front			8.25-15-14PR	300-15-18PR (Double-tyre 8.25-15-14PR)				
3.03	Tyre size,rear			7.00-12-14PR	7.00-12-14PR				
3.04	Wheels,number front/rear (x=driven wheels)				2X/2(Double-tyre 4X/2)				
3.05	Tread,front	b ₁₀	mm			1210			
3.06	Tread,rear	b ₁₁	mm			1190			
	Dimensions								
4.01	Mast tilt angle (forward/backward)	a/β	°			6/12			
4.02	Height (mast lowered)	h ₁	mm			2250			
4.03	Free lifting height	h ₂	mm			150			
4.04	Lifting height (standard)	h ₃	mm			3000			
4.05	Max. height,extended (with backrest)	h ₄	mm		4250		4405		
4.06	Height of overhead guard	h ₆	mm			2350			
4.07	Seat height relating to SIP (to ground)	h ₇	mm			1080			
4.08	Towing coupling height	h ₁₀	mm			430			
4.09	Overall length (with fork)	l ₁	mm	4255	4275 (4425)	4325 (4475)	4375 (4525)		
4.10	Overall length (without fork)	l ₁	mm	3185	3205	3255	3305		
4.11	Overall width	b ₁	mm			1510			
4.12	Fork size:thickness x width x length	s/e/l	mm	50x150x1070	50x150x1070 (50x150x1220)	50x150x1070 (50x150x1220)	55x150x1070 (55x150x1220)		
4.13	Fork carriage,according to ISO2328				III	IV			
4.14	Distance across fork-arms, Max./Min.	b ₅	mm			1374/300			
4.15	Ground clearance (laden,between mast)	m ₁	mm			140			
4.16	Ground clearance (center of wheelbase)	m ₂	mm			230			
4.17	Right angle stacking aisle width for pallet 1000 x1200mm crossways	Ast	mm	4610	4640	4690	4740		
4.18	Right angle stacking aisle width for pallet 800 x1200mm lengthways	Ast	mm	4810	4840	4890	4940		
4.19	Min. outside turning radius	Wa	mm	2850	2880	2930	2970		
	Performance Data								
5.01	Travel speed (laden/unladen)		km/h			25/26			
5.02	Lift speed (laden/unladen)		m/s		0.58/0.62		0.53/0.58		
5.03	Lowering speed (laden/unladen)		m/s			0.45			
5.04	Max.drawbar pull (laden/unladen)		N			41/25			
5.05	Max.gradeability (laden/unladen)		%	33/28	30/28	33/28	30/28		
	Combustion-engine								
6.01	Engine manufacturer/Moel				QUANCHAI 4C6-88C31 BOSCH HPCR				
6.02	Rated power/Speed		kW/rpm			65/2200			
6.03	Max. torque/Speed		Nm/rpm			350/1800			
6.04	Cylinder number-bore x stroke					4-98mmx115mm/3.47L			
6.05	Engine displacement		L			3.47			
6.06	Emission					China stage III			
6.07	Transmission gears (front/rear)					2/1 Intelligent gear shifting			
6.08	Fuel tank capacity		L			110			
	Addition data								
7.01	Service brake/Parking brake					Hydraulic assisted braking/ Mechanical-ratchet type			
7.02	Operating pressure for attachments		Mpa			14			

Engine model and main specification technical data for option

Engine model	Model	Rated power/Speed (kW/rpm)	Max. torque/Speed (Nm/rpm)	Engine displacement (L)	Cylinder number-bore x stroke	Emission
QUANCHAI 4C6-88C31 BOSCH HPCR	CPCD40-55-QC7G3	65/2200	350/1800	3.47	4-98x115	China Stage III
Mitsubishi s6s	CPCD40-55-M4G3	52/2300	248/1700	4.996	6-94x120	China Stage III/Euro IIIA

Wide View Standard Mast

Mast model	Max.lifting height (mm)	Load capacity (lode center 500mm)(kg)				Height (mast lowered) (mm)	Free lift height (with backrest) (mm)	Service weight(kg)				Mast tilt angle α/β (°)
		4t	4.5t	5t	5.5t			4-5t	5.5t	4t	4.5t	
M250	2500	4000	4500	5000	5500	2000	150	6200	6460	6870	7230	6°/12°
M300	3000	4000	4500	5000	5500	2250	150	6250	6510	6920	7280	6°/12°
M330	3300	4000	4500	5000	5500	2400	150	6280	6540	6950	7310	6°/12°
M350	3500	4000	4500	5000	5500	2500	150	6300	6560	6970	7330	6°/12°
M370	3700	4000	4500	5000	5500	2600	150	6315	6575	6985	7345	6°/12°
M400	4000	4000	4500	5000	5500	2800	150	6390	6650	7060	7420	6°/12°
M425	4250	4000	4500	5000	5500	2925	150	6415	6675	7085	7445	6°/6°
M450	4500	*3800 *4000	*4500 *4700	*5000 *5200	*5500 *5700	3050	150	6435	6695	7105	7465	6°/6°
M475	4750	*3700 *4000	*4500 *4700	*5000 *5200	*5500 *5700	3175	150	6460	6720	7130	7490	6°/6°
M500	5000	*3700 *4000	*4200 *4400	*4600 *4800	*5000 *5200	3300	150	6485	6745	7155	7515	6°/6°
M550	5500	*3400 *3600	*4000 *4200	*4200 *4500	*4500 *4800	3600	150	6575	6835	7245	7605	6°/6°
M600	6000	*3200 *3400	*3600 *3800	*4000 *4200	*4200 *4500	3850	150	6625	6885	7295	7655	6°/6°

Wide View Full Free 2-Stage Mast

Mast model	Max.lifting height (mm)	Load capacity (lode center 500mm)(kg)				Height (mast lowered) (mm)	Free lift height (with backrest) (mm)	Service weight(kg)				Mast tilt angle α/β (°)
4t	4.5t	5t	5.5t	4-5								